

PRODUCT INFORMATION & INSTALLATION GUIDE 2025

Airius Model PS-4 ONYX SERIES EX-ONYX-P4-STD-230





Product Information & Installation Guide ONYX SERIES - Model PS-4

MODEL PS-4 DIMENSIONS AND PROPERTIES



UNIT SIZEWeight:

STANDARD

5.9 kgs (13 lbs)

Height to Rim: 307 mm (12.1 in)
Total Height: 424 mm (16.7 in)
Diameter: 391 mm (15.4 in)

MOTOR 230V @ 50 Hz

Watts*: 65.6 RPM*: 1371

L/S*: 513 (1089 CFM)

m³/hr: 1850

Centre Line Velocity¹: 1.02 m/s @ 9 m

AMPS*: 0.30

*Motor data provided by motor manufacturer and is subject to change at anytime $^{1}\text{Velocity}$ profile tested in situ

COVERAGE Heating Cooling

Ceiling Height = Up to 13 m (42 ft) Up to 9 m (29 ft)

Nozzle Height = Up to 12 m (39 ft) Up to 8 m (26 ft)

Floor Area = Up to 185 m² (2000 ft²) Up to 111 m² (1200 ft²)

All data is indicative only and can change subject to application. For more accurate design please contact Airius.

NOISE LEVELS

Sound Pressure Level = 42 dB(A)

Calculated from nozzle of unit to head height when installed at maximum ceiling height

For additional noise level information contact Airius

MOTOR

Single Phase

PSC - Permanent Split Capacitor motor

230 Volt @ 50 Hz

COLOUR

Cool gray 2C - Off white as standard

Can be tailor painted to your colour specifications

Titan Series Upgrade - Off white as standard

OPERATING TEMPERATURES

Operating Temperature = -25°C (-13°F) to 70°C (158°F) Thermal Cut Off = 70°C (158°F)

HOUSING

PC/ABS Resin - Inc. internal fixed blade stator, nozzle and cowl UL 94 5VA flame resistance rating

1.8 m steel safety leash cable (fastened to housing)

Applicable to Titan Series Upgrade - Chemical resistant ABS resin housing and stator blades with stainless steel fixings

ACCESSORIES & OPTIONS

Optional speed controls allow for variable output from Airius unit.

1 AMP and 5 AMP controls available

Air & Surface Purification - Used to mitigate contaminants:

- NPBI kit - Needlepoint BiPolar Ionization - Leading Ion technology

For horizontal installations Airius recommend the use of a cradle, a second cable or a rod attachment to support the fan nozzle

INGRESS PROTECTION

IP44 Rated

WARRANTY

3 years parts and workmanship from shipping date 120 day money back guarantee (T's & C's apply)


info@airius.co.uk www.airius.co.uk



Product Information & Installation Guide

ONYX SERIES - Model PS-4

VELOCITY PROFILE

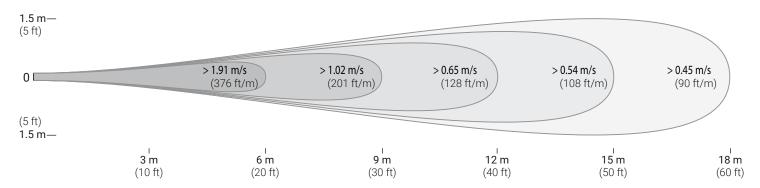

UNIT PLACEMENT

PREPARATION

Install electrical circuit(s) and outlet(s) in accordance with national and local electric codes.

Outlets should generally be mounted vertically unless a "twist/locking" type is being used.

Wall switch may be installed in circuit to disable power and prevent electrical hazards when servicing.

Confirm electrical continuity of Airius unit on the ground before permanently mounting in the ceiling.

MAINTENANCE

Frequency of cleaning will vary by application and environment.

You may clean the plastic housing with a damp warm cloth, using mild household detergents.

Do not use petroleum products, thinners or solvents to clean any part of the Airius unit.

If the Airius unit fails, contact manufacturer.

MATERIALS & PROPERTIES

Constructed from recyclable materials.

The outer shell, stator and fan blades are fire rated UL 94 5VA materials.

Power cord is a 1.8 m, 3 wire, 1.02 mm diameter 300VAC rated electrical cord - CE/EU compliance rated as HO5VV (PLUG NOT SUPPLIED).

Single phase, shaded pole, single speed, axial motor.

Motor is thermally protected. Cut off is at 70°C.

No lubrication required. Bearings are sealed.

OPERATION

Designed to operate 24 hours-a-day, 7 days-a-week to maintain air circulation/thermal equalization/humidity equalization.

Use optional speed control to fine tune RPM if needed.

INSTALLATION

Do not hard connect fans in excess of 10 kgs unless agreed with Airius prior to Installation. When attaching it is preferred if some chain or cable is used between fan and the support. However it is not imperative.

Hang from the ceiling, typically 300 mm (12") - 450 mm (18") from the roof deck to fan intake.

For cooling applications fans can be installed slightly lower. Contact Airius for design details and assistance.

The Airius unit performs best when air column from the nozzle is unimpeded to the floor.

The Airius unit should not be mounted directly in front of heat ducts, vents or any other high heat source.

Use professionally installed hardware, capable of supporting a minimum of five times the weight of the fan unit.

Hardware to hang the unit includes but is not restricted to: Hooks, chains, cables, carabiners, bridle rings, beam clamps and bolts.

Density of the placement is directly related to the effectiveness, performance and savings.

Mount out of reach from people and animals.

Floor plans, mezzanines, office locations, machinery, people placement, plumbing, lighting, duct work, electrical systems, natural light/air systems, cranes, doors, windows, ventilation and fire suppression systems are all factors in properly locating the Airius system within the ceiling.

info@airius.co.uk www.airius.co.uk




Product Information & Installation Guide

ONYX SERIES - Model PS-4


CHAIN HUNG (STRAIGHT)

PLUG NOT SUPPLIED

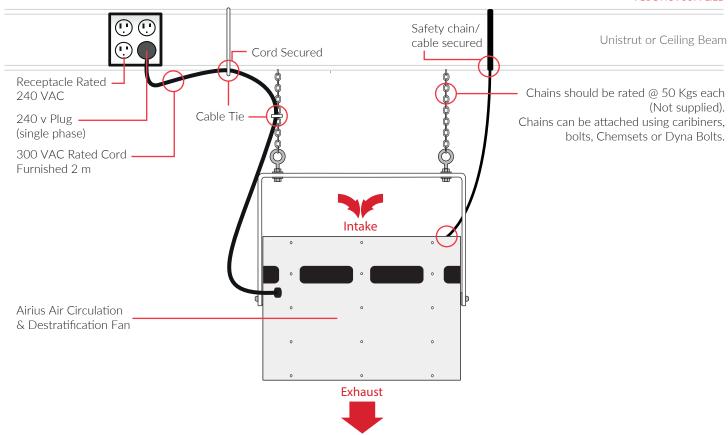

CEILING FIXED (STRAIGHT)

PLUG NOT SUPPLIED

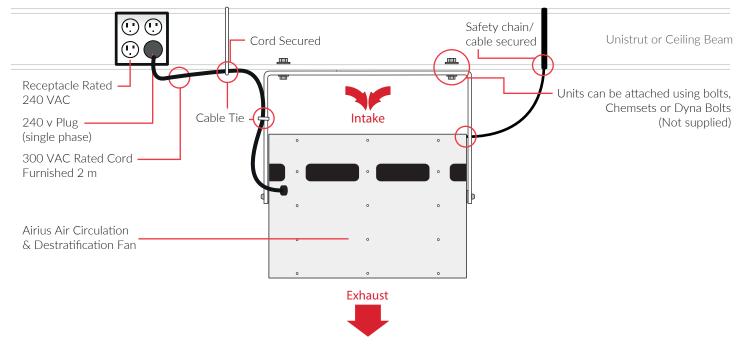

info@airius.co.uk www.airius.co.uk




Product Information & Installation Guide


ONYX SERIES - Model PS-4

CHAIN HUNG (ANGLED)

PLUG NOT SUPPLIED

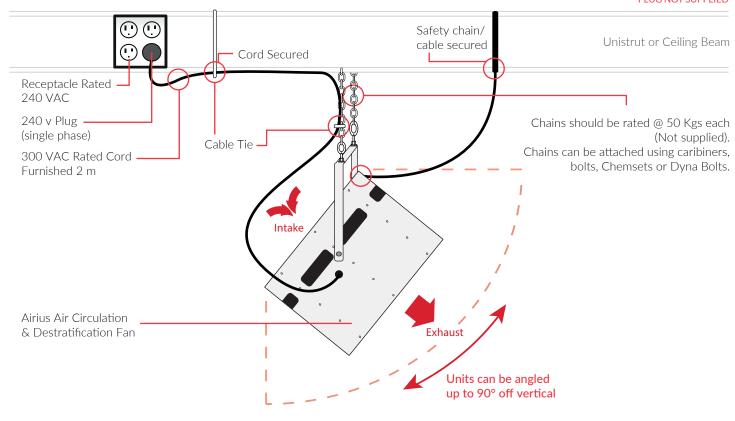

CEILING HUNG (ANGLED)

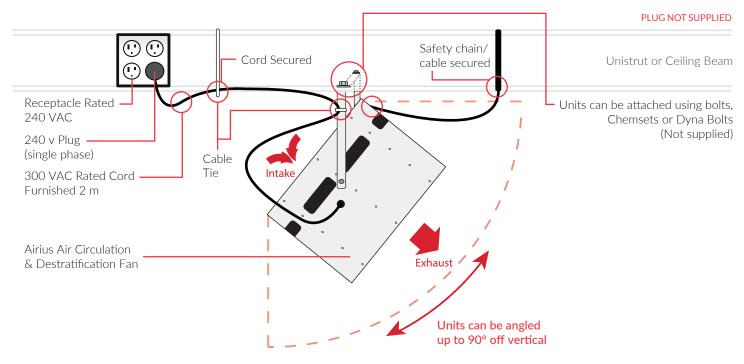

info@airius.co.uk | www.airius.co.uk



Airius Europe, Middle East & Asia

Airius Europe Ltd Holwell Farm, Cranborne Dorset BH21 5QP, UK Tel - +44 (0) 1202 554200 Email - info@airius.co.uk Web - www.airius.co.uk

Airius Americas

Email - Info@airiusfans.com

Web - www.airiusfans.com

Airius Oceania & S.E. Asia

Email - info@airius.com.au Web - www.airius.com.au

USA and foreign Patents granted to AIRIUS LLC, USA, further patents pending. AIRIUS & AIRIUS SYSTEMS is the copyright property of AIRIUS LLC, USA. All material issued by, or emanating from, Airius Europe Ltd is the Copyright property of Airius Europe Ltd, UK.

